



Technical File

Argu Baffle

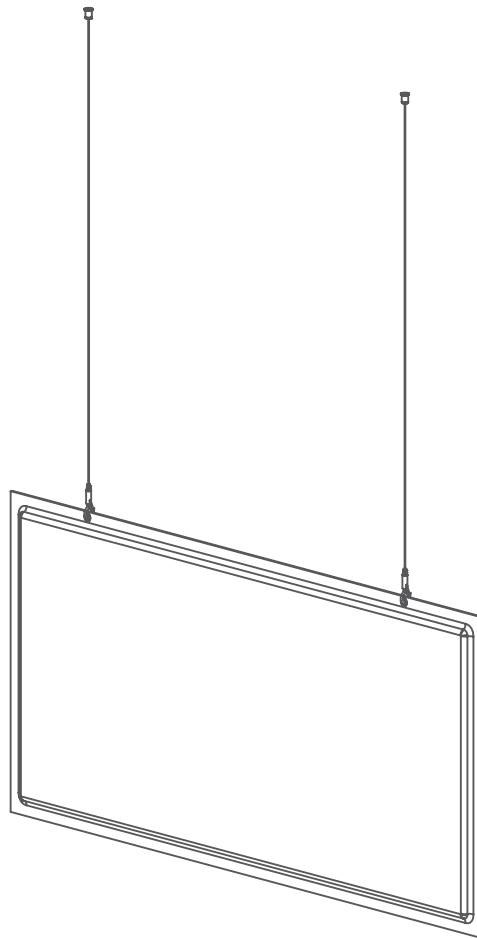

01

Dimensions

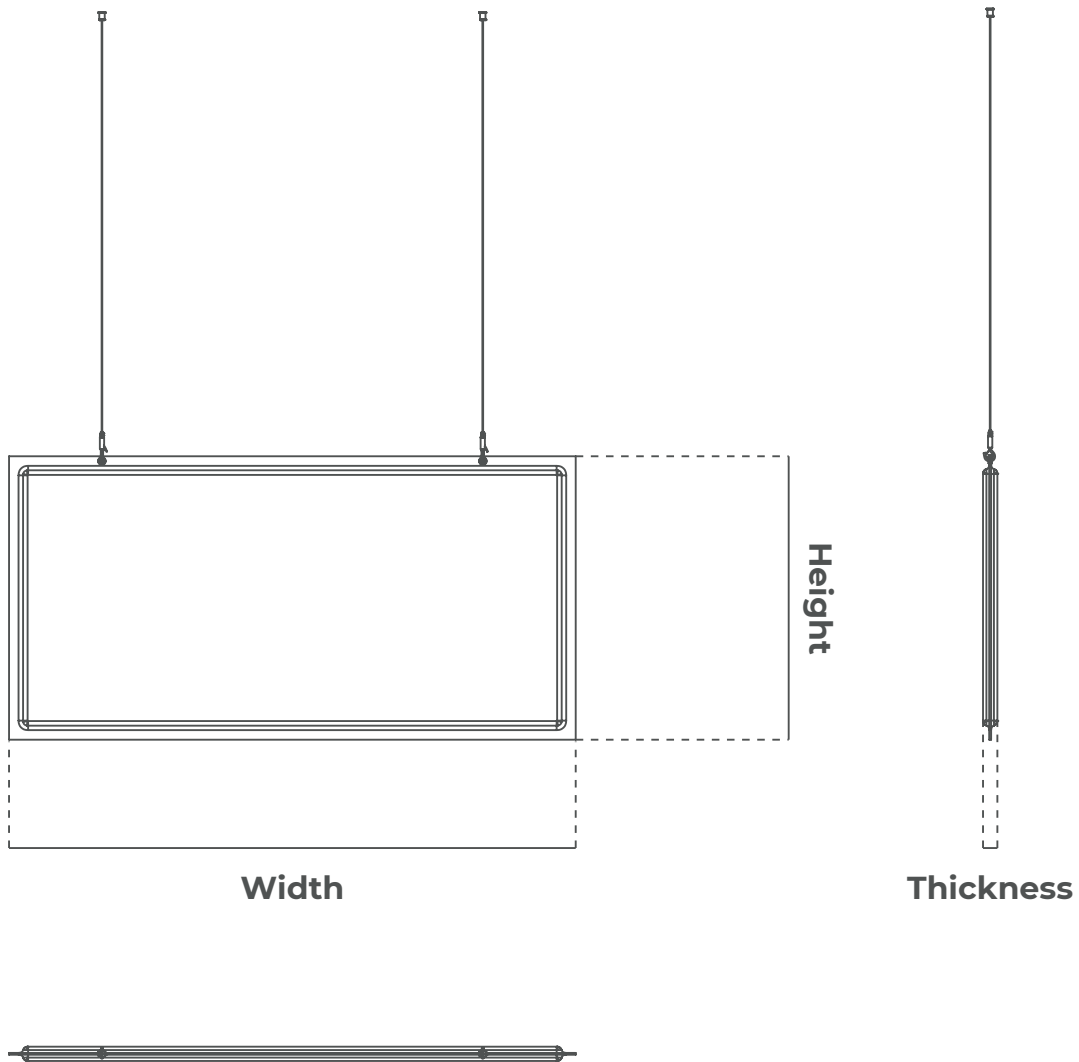

Argu Baffle

Width: 1190 mm Height: 595 mm Thickness: 30 mm


02

Finishes




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Solid Colour
Pearl




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Solid Colour
Storm



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Solid Colour
Indigo Blue




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Pewter




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish
Espresso




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish Lemon




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish Ruby



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish Kelly



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt | Melange Finish Cerulean